




Flammable Liquid Storage



**CRESCENT
JOBBOX**

**Because in a Crisis,
Every Second Counts**

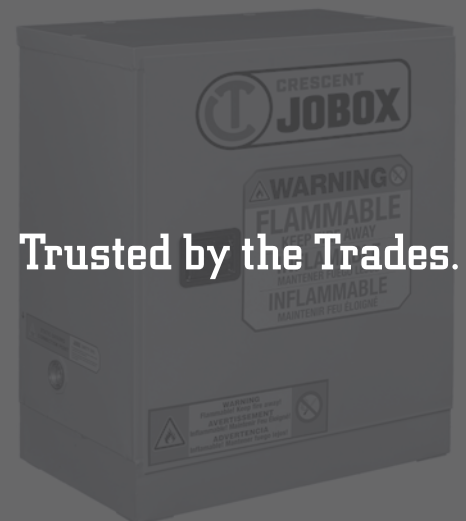

Trusted by the Trades.

Crescent JOBOX Safety Cabinets

Keep flammable liquids organized, secure, and protected from fire with UL tested Crescent JOBOX safety cabinets. With exclusive features like EZ Level™ bolsters, permanent safety labels, and white shelves, these cabinets offer improved safety with the security and durability Crescent JOBOX storage products are known for.

18 Gauge Double Wall and Superior Construction

Far surpassed UL Testing Requirements

Tilted Spill-Guide Interior Shelving

Directs spills to the back of the cabinet and into the retention sump area for easy clean up

Powder Paint Finish

Superior resistance to abrasion, weather, UV and scratch damage

Staked and Welded Hinges

14-gauge steel, 3/8" continuous hinge with extra-large 1" knuckles provides the ultimate in protection — it's 1/4" steel pin cannot be driven or pried out

Highly Visible Safety and Warning Labels

Provide a permanent reminder and reference for following proper safety and usage practices

High/Low Vent Connections

Secure 3-point Lock System

Featuring a rugged lockable paddle handle that restricts access and reduces theft potential

EZ-Level Skid Bolsters

Constructed with a leveling screw access hole, which provides quick and easy access when leveling your cabinet is necessary. The design features the unique anti-tip design which provides maximum stability and tipping resistance. (excludes 12 Gal.)



Trusted by the Trades.



Self-Latching 3-point Door Locking System

Includes a heavy-duty enclosed staggering mechanism that ensures the doors close in proper order. The fusible link assembly disconnects at 165° F to close doors and keep danger inside

Extra Heavy Duty 1 3/4" Thick Doors

Provide greater insulation between door panels

Bright Interior

Aids in identifying when spills have occurred




Tilted Spill-Guide Interior Shelving

Directs spills to the back of the cabinet and into the retention sump area for easy clean up

Burn Test Results

To receive UL certification, a cabinet must pass a 10 minute burn test. The UL burn test heats the outside of the cabinet to +1,250°F for 10 minutes and the interior of the cabinet must remain below 325°F to pass. A leading competitor failed the UL certificate because its interior was +700°F. Crescent JOBOX passed the UL certificate with interior temperatures below 250°F.***



Manual-Closing Safety Cabinets

Keep flammable liquids organized, secure, and protected from fire with UL listed Crescent JOBOX Safety Cabinets. With exclusive features like EZ Level™ bolsters (excludes 12 gallon), permanent safety labels, and white shelves, these cabinets offer improved safety with the security and durability Crescent JOBOX storage products are known for.



Yellow Safety Cabinets are industry standard yellow for storage of flammable liquids.

Catalog No.	Capacity	Exterior Dimensions H x W x D	Interior Dimensions H x W x D	No. of Doors	No. of Spill Guide Shelves	Compliance / Listings	Approx. Shipping Wt.
1-750640	12 gal [US], 45 l	37-3/16 x 30-13/32 x 23-19/32	26-31/32 x 26-27/32 x 16	1	1	UL, NFPA, OSHA	175 lb
1-753640	30 gal [US], 113.5 l	45-23/32 x 46-5/16 x 20- 25/32	32-1/16 x 42-5/8 x 16-23/32	2	1	UL, NFPA, OSHA	276 lb
1-756640	45 gal [US], 170 l	66-23/32 x 46-5/16 x 24	53-1/32 x 42-5/8 x 16-23/32	2	2	UL, NFPA, OSHA	363 lb
1-758640	60 gal [US], 227 l	66-23/32 x 46-5/16 x 27-7/8	53-1/32 x 42-5/8 x 23-13/16	2	2	UL, NFPA, OSHA	421 lb
1-759640	90 gal [US], 340.6 l	66-23/32 x 46-5/16 x 34-1/16	53-1/32 x 42-5/8 x 26-25/32	2	2	UL, NFPA, OSHA	465 lb

Trusted by the Trades.



Red Safety Cabinets are industry standard red for storage of paints, inks, and other combustibles.

Catalog No.	Capacity	Exterior Dimensions H x W x D	Interior Dimensions H x W x D	No. of Doors	No. of Spill Guide Shelves	Compliance / Listings	Approx. Shipping Wt.
1-750610	12 gal (US), 45 l	37-3/16 x 30-13/32 x 23-19/32	26-31/32 x 26-27/32 x 16	1	1	UL, NFPA, OSHA	175 lb
1-753610	30 gal (US), 113.5 l	45-23/32 x 46-5/16 x 20- 25/32	32-1/16 x 42-5/8 x 16-23/32	2	1	UL, NFPA, OSHA	276 lb
1-756610	45 gal (US), 170 l	66-23/32 x 46-5/16 x 24	53-1/32 x 42-5/8 x 16-23/32	2	2	UL, NFPA, OSHA	363 lb
1-758610	60 gal (US), 227 l	66-23/32 x 46-5/16 x 27-7/8	53-1/32 x 42-5/8 x 23-13/16	2	2	UL, NFPA, OSHA	421 lb
1-759610	90 gal (US), 340.6 l	66-23/32 x 46-5/16 x 34-1/16	53-1/32 x 42-5/8 x 26-25/32	2	2	UL, NFPA, OSHA	465 lb

Green Safety Cabinets are industry standard green for storage of outdoor chemicals.

Catalog No.	Capacity	Exterior Dimensions H x W x D	Interior Dimensions H x W x D	No. of Doors	No. of Spill Guide Shelves	Compliance / Listings	Approx. Shipping Wt.
1-750620	12 gal (US), 45 l	37-3/16 x 30-13/32 x 23-19/32	26-31/32 x 26-27/32 x 16	1	1	UL, NFPA, OSHA	175 lb
1-753620	30 gal (US), 113.5 l	45-23/32 x 46-5/16 x 20- 25/32	32-1/16 x 42-5/8 x 16-23/32	2	1	UL, NFPA, OSHA	276 lb
1-756620	45 gal (US), 170 l	66-23/32 x 46-5/16 x 24	53-1/32 x 42-5/8 x 16-23/32	2	2	UL, NFPA, OSHA	363 lb
1-758620	60 gal (US), 227 l	66-23/32 x 46-5/16 x 27-7/8	53-1/32 x 42-5/8 x 23-13/16	2	2	UL, NFPA, OSHA	421 lb
1-759620	90 gal (US), 340.6 l	66-23/32 x 46-5/16 x 34-1/16	53-1/32 x 42-5/8 x 26-25/32	2	2	UL, NFPA, OSHA	465 lb

Type I Safety Cans

Crescent JOBOX Type I Cans are made of resilient terne plate steel for the ultimate in corrosion resistance. They have one opening and are recommended for storage, but can be used with a funnel for pouring into other containers. Stringently UL and ULC tested and listed.



Red - Gasoline/Flammable Liquids

Catalog No.	Capacity	Diameter (in) x Hose L	Compliance / Listings	Approximate Ship Weight
812990	2 gal (US), 7.5 l	9 x 6	UL/ULC/OSHA/NFPA	6 lb
812990F*	2 gal (US), 7.5 l	9 x 6	UL/ULC/OSHA/NFPA	6 lb
815990	5 gal (US), 19 l	11.5 x 9	UL/ULC/OSHA/NFPA	9 lb
815990F*	5 gal (US), 19 l	11.5 x 9	UL/ULC/OSHA/NFPA	9 lb

Yellow - Diesel

Catalog No.	Capacity	Diameter (in) x Hose L	Compliance / Listings	Approximate Ship Weight
812990Y	2 gal (US), 7.5 l	9 x 6	UL/ULC/OSHA/NFPA	6 lb
812990YF*	2 gal (US), 7.5 l	9 x 6	UL/ULC/OSHA/NFPA	6 lb
815990Y	5 gal (US), 19 l	11.5 x 9	UL/ULC/OSHA/NFPA	9 lb
815990YF*	5 gal (US), 19 l	11.5 x 9	UL/ULC/OSHA/NFPA	9 lb

* Funnel Included

Self-Closing Safety Cabinets

With Crescent JOBOX Self-Closing Cabinets, users can work freely with peace of mind knowing that their flammable liquids will be secure. Extra-robust fusible link system will operate at 165°F to close the doors, and a heavy-duty, galvanized staggering mechanism ensures the doors close securely in the event of a fire. Fully enclosed, the Crescent JOBOX self-closing system ensures safe operation while offering maximum storage space inside the cabinet.



Yellow Safety Cabinets are industry standard yellow for storage of flammable liquids.

Catalog No.	Capacity	Exterior Dimensions H x W x D	Interior Dimensions H x W x D	No. of Doors	No. of Spill Guide Shelves	Compliance / Listings	Approx. Shipping Wt.
1-754640	30 gal (US), 113.5 l	45-23/32 x 46-5/16 x 20- 25/32	32-1/16 x 42-5/8 x 16-23/32	2	1	UL, NFPA, OSHA	285 lb
1-757640	45 gal (US), 170 l	66-23/32 x 46-5/16 x 24	53-1/32 x 42-5/8 x 16-23/32	2	2	UL, NFPA, OSHA	372 lb



Red Safety Cabinets are industry standard red for storage of paints, inks, and other combustibles.


Catalog No.	Capacity	Exterior Dimensions H x W x D	Interior Dimensions H x W x D	No. of Doors	No. of Spill Guide Shelves	Compliance / Listings	Approx. Shipping Wt.
1-754610	30 gal [US], 113.5 l	45-23/32 x 46-5/16 x 20- 25/32	32-1/16 x 42-5/8 x 16-23/32	2	1	UL, NFPA, OSHA	285 lb
1-757610	45 gal [US], 170 l	66-23/32 x 46-5/16 x 24	53-1/32 x 42-5/8 x 16-23/32	2	2	UL, NFPA, OSHA	372 lb

Green Safety Cabinets are industry standard green for storage of outdoor chemicals.

Catalog No.	Capacity	Exterior Dimensions H x W x D	Interior Dimensions H x W x D	No. of Doors	No. of Spill Guide Shelves	Compliance / Listings	Approx. Shipping Wt.
1-754620	30 gal [US], 113.5 l	45-23/32 x 46-5/16 x 20- 25/32	32-1/16 x 42-5/8 x 16-23/32	2	1	UL, NFPA, OSHA	285 lb
1-757620	45 gal [US], 170 l	66-23/32 x 46-5/16 x 24	53-1/32 x 42-5/8 x 16-23/32	2	2	UL, NFPA, OSHA	372 lb

Type II Safety Cans

Designed for pouring flammable liquids. Crescent JOBOX Type II Cans offer two openings, one for fill and one for pour. Brass tipped pouring hose prevents sparking, and special implosion resistance system ensures a safe pour every time. Stringently UL and ULC Tested and Listed.

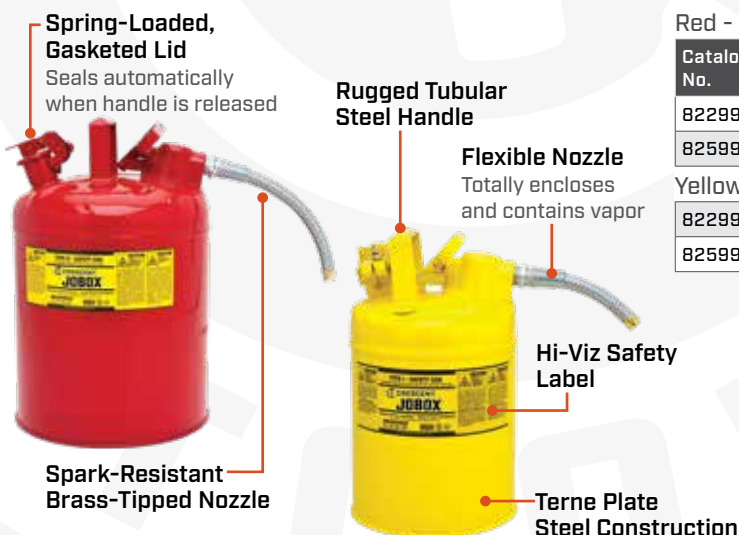

Red - Gasoline/Flammable Liquids

Catalog No.	Capacity	Diameter (in) x Hose L	Compliance / Listings	Approximate Ship Weight
822990	2 gal [US], 7.5 l	9 x 6	UL/ULC/OSHA/NFPA	8.5 lb
825990	5 gal [US], 19 l	11.5 x 9	UL/ULC/OSHA/NFPA	12 lb

Yellow - Diesel

822990Y	2 gal [US], 7.5 l	9 x 6	UL/ULC/OSHA/NFPA	8.5 lb
825990Y	5 gal [US], 19 l	11.5 x 9	UL/ULC/OSHA/NFPA	12 lb



Frequent inspection is an extremely important aspect of safe flammable liquid handling and storage. Establish a scheduled visual inspection of every safety cabinet in your facility to verify compliance with all applicable regulations. Do not become complacent. A little preventative work can go far in preventing a fire hazard. Periodically verify the following items for each cabinet in your facility and correct immediately if not in compliance:



Ensure the immediate area where the cabinet is located is clear of debris and away from running machinery or any activity involving heat. The floor or decking beneath the cabinet should be solid and stable.



Ensure contents of cabinet are organized so they are visible and identifiable without moving items out of the way. Verify that all containers in the cabinet are properly closed and sealed.



Ensure Material Safety Data Sheet (MSDS), whether paper or electronic, for the liquid being stored is close by and readily accessible.



Ensure cabinet is properly grounded to facility grounding grid or earth source if applicable. Grounding is mandatory if liquids are ever transferred from inside the cabinet.



Ensure shelves are clean and sit fully in the side wall brackets.



Verify that there is no debris accumulation underneath the cabinet, and that the cabinet is level.



Verify that the cabinet sump is clean and empty. If liquid or debris is found, ensure it is removed immediately using approved procedures and properly disposed of.



Verify that cabinet is properly vented. If cabinet venting is not required, ensure cabinet is in a well ventilated area and that venting caps are tightly closed.



Verify that cabinet is locked and that only properly trained and authorized personnel have access.



For self-closing cabinets, verify that fusible link assemblies for all doors are properly installed and that only OEM (from the original manufacturer) fusible links are used.

Always ensure that the cabinet is the appropriate color for the liquid being stored:

FLAMMABLES

PAINTS, INKS
COMBUSTIBLES

PESTICIDES
INSECTICIDES

SAFETY COMPLIANCE

Crescent JOBOX cabinets and cans comply with all applicable specifications set forth by the Occupational Safety and Health Administration (OSHA) and the National Fire Protection Association (NFPA). Crescent JOBOX self-closing cabinets also comply with the International Code Consortium/International Fire Code (IFC). Compliance to these specifications is in the process of being independently tested and listed by Underwriters Laboratories (UL) the internationally recognized third-party testing organization.

SAFETY / SELF-CLOSING SAFETY CABINETS

- Specified by the Safety Professional ~ Required by OSHA in the Workplace
- Meets requirements of OSHA 29 CFR 1910.106
- IFC Compliant
- Meets requirements of NFPA 30



*** ATG purchased a 2014 model year JUSTRITE SURE GRIP EX model number 894500 cabinet and in April 2014 ATG had that cabinet tested by UL for compliance with UL 1275 standard. The cabinet did not pass that part of the test which requires that the internal cabinet temperature be 325 degrees Fahrenheit or less when the cabinet is externally heated by fire at certain temperatures for certain durations per the standard.

Warranty Information:

Crescent JOBOX® Products Limited Warranties

This product warranty is made by Apex Tool Group, LLC (ATG) to only the original purchaser and it is valid as indicated in the table below from date of purchase, upon presentation of the original sales receipt at the time the warranty claim is made. ATG warrants its product to be free from defects in materials and workmanship at the time of the sale. This warranty does not cover damage caused by accident or unreasonable or unintended use of the product. Modification, disassembly and/or reassembly of the product will invalidate this warranty. Damage to the contents of the box or other consequential damages of whatever kind are hereby excluded from this warranty. Use only parts or accessories supplied by Apex Tool Group, LLC. Parts or accessories from other manufacturers or suppliers could alter the function and safety of the product(s) and void this warranty.

Safety Cabinets.....5 Years

Safety Cans.....5 Years